

# HIDE IN HIDEOUT


- 1) Connect the four tube & joint sets to create four poles by pushing them into the joints (A).
- 2) Lay tent on floor. Feed one pole through the sleeve at the corner of the tent until it reaches the middle. Attach pole to cross joint (B) at the top and secure into the pocket at the corner.
- 3) Repeat with the other three poles. Tie the cords across the cross joint at the top for added security.

Please note: The poles are designed to support the tent's nylon cover and should not be used for any other purpose otherwise breakage may occur

**A. Tube & Joint Set**



**B. Cross Joint**

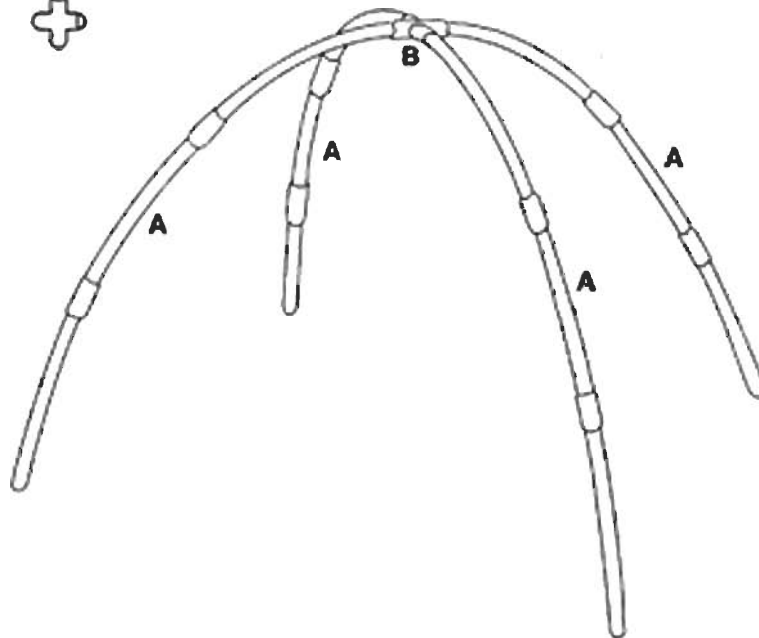

**WARNING: KEEP ALL FLAME & HEAT SOURCES AWAY FROM TENT FABRIC**  
The tent meets the flammability requirements of CPAI-84. The fabric may burn if left in continuous contact with any flame source. The application of any foreign substance to the tent fabric may render the flame-resistant properties ineffective.